

RANGER

bolle
SAFETY



LENS

- + 'PLATINUM' ASAF COATING
- + LATERAL PROTECTION

FRAME

- + ULTRA FLEXIBLE
- + COMFORTABLE

TEMPLES

- + NON-SLIP TEMPLES
- + COMFORTABLE BI-MATERIAL
- + LATERAL PROTECTION & VENTILATION



SMOKE
#RANGPSF



RED FLASH
#RANGFLASH



POLARIZED
#RANGPOL



+ MICROFIBER POUCH AND INDIVIDUAL SOFT CARRY CASE INCLUDED

VERSIONS

DESCRIPTION

TECHNOLOGIES


Certified MIL-PRF-31013 and ANSI Z87.1-2010 these RANGER ballistic protection sunglasses ensure maximum protection in all circumstances. Thanks to its bridge, nylon non-slip temples and lateral ventilation, RANGER provides comfort and protection. RANGER is available with smoke ('PLATINUM' coating), red flash and POLARIZED lenses.

'PLATINUM' (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.

POLARIZED

A technology approved for permanent wear and certified with perfect optical quality, it offers unbeatable comfort by filtering glare and reflections. Ideal for the maritime environment. Filters 99.99% of UVA/UVB.

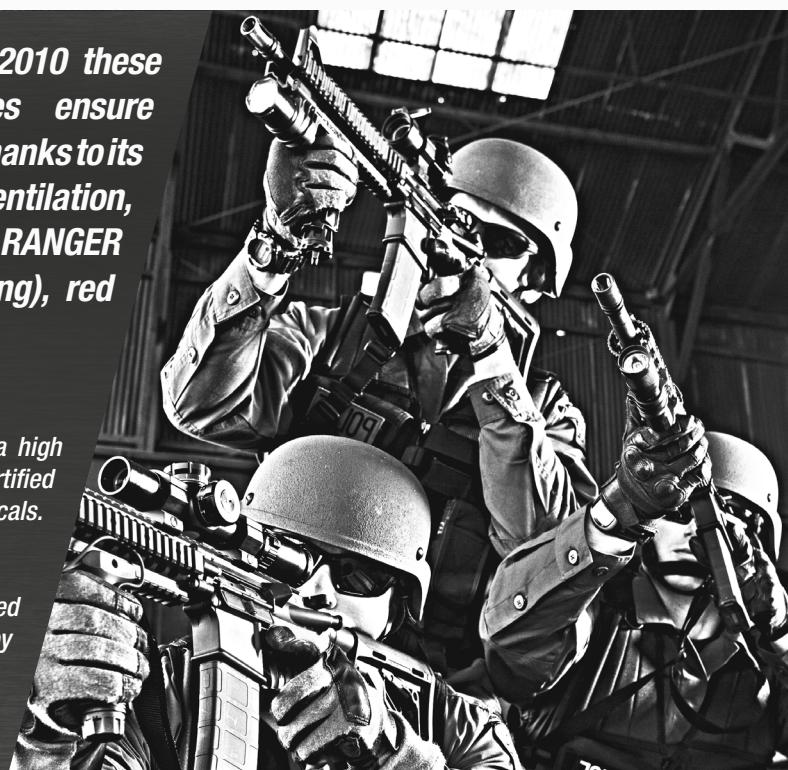

RANGER



MODEL	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
RANGER*	Smoke	RANGPSF	5-3,1 1 FT KN €€	EN166 FT €€	667 km/h - 188 m/s	ANSIZ87.1-2010 MIL-PRF-31013	ASAF
	Red Flash	RANGFLASH	5-3,1 1 FT €€	EN166 FT €€	673 km/h - 187 m/s	ANSIZ87.1-2010 MIL-PRF-31013	ASAF
	POLARIZED	RANGPOL	5-3,1 1 FT €€	EN166 FT €€	680 km/h - 189 m/s	ANSIZ87.1-2010 MIL-PRF-31013	ASAF

* Available while stocks last.

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

€€ European standard Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

€€ European standard Manufacturer name

	RANGPSF	RANGFLASH	RANGPOL
EAN13 Unit pack	3660740001209	3660740001216	3660740001223
EAN13 Inner pack (number of unit per inner pack)	-	-	-
Size // Weight Inner pack	-	-	-
EAN13 Carton (number of unit per master pack)	3660740201203 (95 units)	3660740201210 (95 units)	3660740201227 (130 units)
Size // Weight Master pack	60x50x40 cm 13.1 kg	60x50x40 cm 13.1 kg	60x50x40 cm 13.1 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

RANGER	
Lens	PC - 2.2 mm - Curve 8
Frame	Nylon
Temples	Nylon + PVC
Spare lens	-
Country of origin	Taiwan



For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA