EN166 - BALLISTIC GLASSES

# COMBAT

bollé SAFETY

**LENS**
+ PLATINUM® *ASAF COATING*
+ *BALLISTIC POLYCARBONATE LENS*
+ *OPTIONAL RX KIT*




**STRAP/TEMPLE**
+ *HYBRID MODEL: TEMPLES OR STRAP*

**BRIDGE**
+ *NON-SLIP BRIDGE*

VERSIONS


**#COMBKITN**


**#COMBFIXN**


**#TACTICALRXKIT**

**28 g**

+ *CLEAR BALLISTIC LENS, 2 SPARE LENS, A STRAP AND A CARRY SOFTY CASE INCLUDED.*


DESCRIPTION

***The newest generation of hybrid ballistic spectacles, STANAG 4296, EN166, EN170 and EN172 certified. COMBAT protective spectacles with coating provide unique adaptability thanks to their easy-to-change mono-lens in clear, smoke and CSP versions, and their dual temple/strap system (with or without foam).***

TECHNOLOGIES

PLATINUM® (+P) ***ASAF Coating***
*Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.*

CSP
*This innovating coating is an effective solution for all activities that alternate exposure to bright light and low light, while also being suitable for extreme hot and cold temperature environments. CSP is also combined with the exclusive PLATINUM® coating that sustainably combats fogging.*

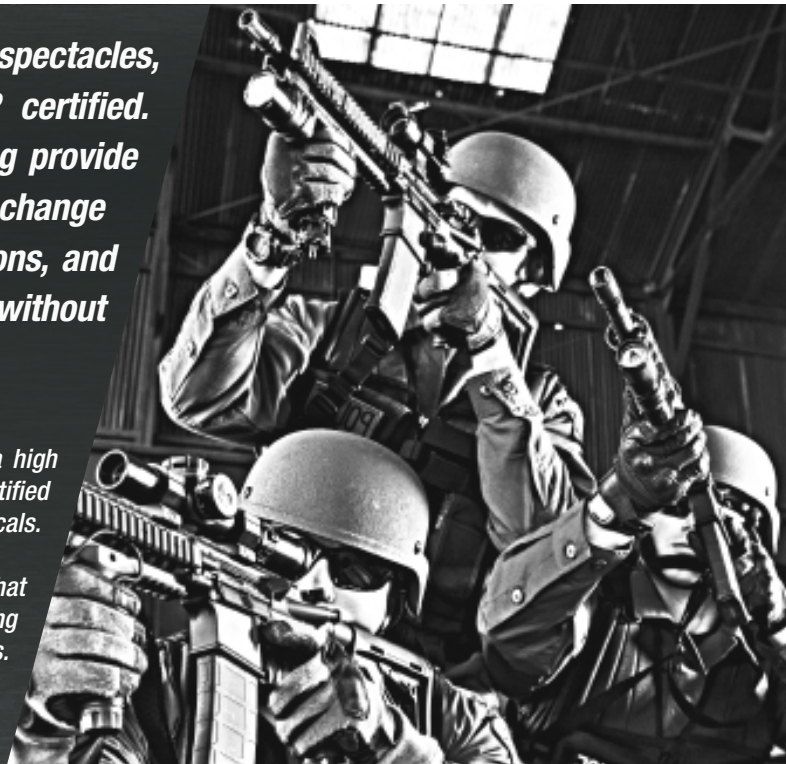

EN166 - BALLISTIC GLASSES

# COMBAT

bollé SAFETY

| MODEL | REFERENCE | VERSION | LENS MARKINGS | FRAME MARKING | V50 BALLISTIC RESISTANCE STANAG 2920 | ANSI/MIL | COATINGS |
|---|---|---|---|---|---|---|---|
| COMBAT | COMBKITN ■ black kit | Clear | 2C-1.2 1 BT KN CE | EN166 FT CE | 824,2 km/h - 229 m/s | ANSIZ87.1-2010 MIL-PRF-31013 | ASAF |
| | | Smoke | 5-3.1 1 BT KN CE | EN166 FT CE | 849,6 km/h - 236 m/s | ANSIZ87.1-2010 MIL-PRF-31013 | ASAF |
| | | CSP | 5-1,4 1 BT KN CE | EN166 FT CE | 918 km/h - 255 m/s | ANSIZ87.1-2015 MIL-PRF-32432 | ASAF |
| | TACTICALRXKIT | Rx insert | - | - | - | - | - |
| | KITFSCOMB | Strap + Foam | - | EN166 3 BT CE | - | ANSIZ87.1-2010 MIL-PRF-43511D | - |
| | COMBFIXN | Elastic fixture +black scratch | | | | | |

*Clear and smoke spare lenses available on demand. Consult your sales representative for more information.*

MARKINGS

## Lens markings

**Optical class symbols:**
**1.** Continuous work

**Mechanical strength symbols:**
**B.** Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s
**T.** The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

**Others symbols:**
**K.** Resistance to surface damage by fine particles
**N.** Resistance to fogging
CE European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

## Frame markings

**Standards :**
**EN166.** guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

**Mechanical strength symbols:**
**F.** Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s
**T.** The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

**Others symbols:**
CE European standard  Manufacturer name

PACKAGING

| | COMBKITN | TACTICALRXKIT | KITFSCOMB | COMBFIXN | FACOMBPSI | FACOMBPSF |
|---|---|---|---|---|---|---|
| **EAN13 Unit pack** | 3660740000141 | 3660740008031 | 3660740000189 | 3660740007409 | 3660740000226 | 3660740000202 |
| **EAN13 Inner pack** (number of unit per inner pack) | - | 3660740108038 (25 units) | 3660740106843 (20 units) | 3660740107406 (20 units) | 3660740100223 (25 units) | 3660740100209 (25 units) |
| **Size // Weight** Inner pack | - | 28x16x7 cm 0,48 kg | 28x16x7 cm 0,57 kg | 24x18,5x9 cm 0,49 kg | 28x16x7 cm 0,66 kg | 28x16x7 cm 0,66 kg |
| **EAN13 Master** (number of unit per master pack) | 3660740200145 (70 units) | 3660740208035 (300 units) | 3660740206840 (240 units) | 3660740207403 (200 units) | 3660740200220 (300 units) | 3660740200206 (300 units) |
| **Size // Weight** Master pack | 60x50x40 cm 18,8 kg | 46x37x30 cm 5,9 kg | 46x37x30 cm 7,8 kg | 46x37x30 cm 6,5 kg | 46x37x30 cm 10,3 kg | 46x37x30 cm 10,3 kg |

*Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.*
*Storage: All products must be stored in a dry and clean environment.*

CHARACTERISTICS

| COMBAT | |
|---|---|
| **Lens** | PC - 2.2 mm (from 1.5 mm to 2.6mm) - Curve 9 |
| **Foam** | - |
| **Strap** | Nylon - 16 mm |
| **Spare lens** | Yes |
| **Country of origin** | Taiwan |

LABORATORIES

Banc Officiel d'Epreuve Saint-Etienne · BSI Product Services · DIN · INSPEC · CE · ICS INCE LABORATORIES INDEPENDENTLY TESTED PRODUCTS

For more information on this product and the BSSI range, visit:

**www.bollesafety-si.com**

BOLLÉ SAFETY
34 rue de la Soie
69100, Villeurbanne
FRANCE

*11/02/2021*