

X800

LENS

- + 'PLATINUM' ASAF COATING
- + BALLISTIC LENS
- + PANORAMIC VISUAL FIELD
- + EASY REPLACEMENT LENS SYSTEM



FRAME

- + HIGH COMFORT BI-MATERIAL FRAME
- + ULTRA-VENTILATED FRAME



CLEAR
#X800I



RX INSERT
#SOSX800

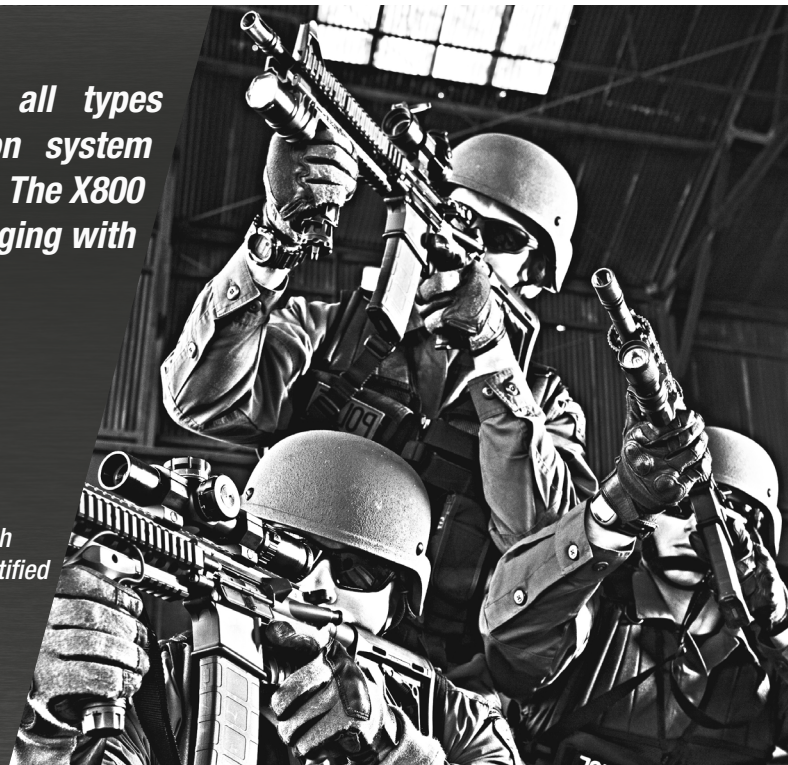


+ SUPPLIED WITH MICROFIBRE POUCH AROUND THE STRAP AND INDIVIDUAL RIGID CARRY CASE.





The X800 goggle is compatible with all types of helmets. It has a unique ventilation system guaranteeing excellent fogging resistance. The X800 goggle provides the best resistance to fogging with its 'PLATINUM' coating.

'PLATINUM' (P) ASAF Coating

Permanent coating on both sides of the lens gives them a high resistance to scratching, and delays the onset of fogging. Certified K & N (EN166) PLATINUM® resists to the most aggressive chemicals.



X800

MODEL	REFERENCE	VERSION	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATINGS
X800 Goggle	X800I	 Clear	 1 BT KN C€	 EN166 BT C€	716 km/h - 199 m/s	-	ASAF 
X800 RX insert	SOSX800	RX insert	-	-	-	-	-

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

C€ European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

Frame markings

Standards:

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

3. Liquid droplets or splashes

4. Large dust particles > 5 microns

5. Gas and fine dust particles < 5 microns.

B. Medium energy impact, resists a 6 mm, 0.86 g ball at 120 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

C€ European standard  Manufacturer name

	X800I	SOSX800
EAN13 Unit pack	3660740002749	3660740000080
EAN13 Inner pack (number of unit per inner pack)	-	(30 units)
Size // Weight Inner pack	-	32,6x16,9x12,5 cm 0,9 kg
EAN13 Master (number of unit per master pack)	3660740202743 (40 units)	3660740200084 (500 units)
Size // Weight Master pack	60x50x38 cm 14 kg	60x50x38 cm 6 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product.

After each use it is recommended to keep the spectacles or goggles in a microfiber pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

X800	
Lens	PC - 3 mm - Curve 5
Frame	Nylon + TPE
Strap	Adjustable 35 mm
Spare lens	-
Country of origin	Taiwan

For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA