

ROGUE



LENS
+ PANORAMIC FIELD OF VISION
+ EASY REPLACEMENT LENS SYSTEM

TEMPLES
+ INTEGRATED LATERAL PROTECTION

FRAME
+ WRAP AROUND

VERSIONS



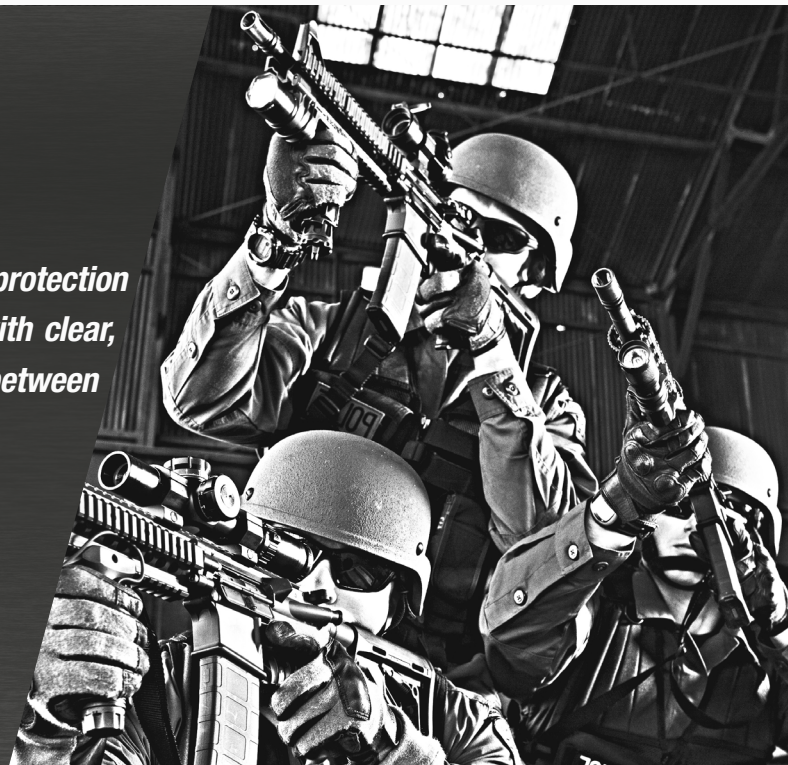
**ROGUE
KIT**
#ROGKIT

+ MICROFIBER POUCH, SPARE LENSES AND A RIGID CARRY CASE INCLUDED










28 g

DESCRIPTION

Stylish, light-weight, comfortable and ballistic protection make ROGUE unique. Packed in a carry case with clear, yellow and smoke lenses, you can easily switch between the lens versions as necessary.



ROGUE

MODEL	VERSIONS	REFERENCES	LENS MARKINGS	FRAME MARKINGS	V50 BALLISTIC RESISTANCE STANAG 2920	ANSI/MIL	COATING
ROGUE*	 Clear lens	ROGKIT	2C-1.2  1 F  €	 EN166 F €	785 km/h - 218 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF
	 Smoke lens		5-3.1  1 F €	-	763 km/h - 212 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF
	 Yellow lens		2C-1.2  1 F €	-	770 km/h - 214 m/s	ANSIZ87.1-2010 MIL-PRF-31013	AS/AF

* Available while stocks last.

Lens markings

Optical class symbols:

1. Continuous work

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

K. Resistance to surface damage by fine particles

N. Resistance to fogging

€ European standard  Manufacturer name

Frame markings

Standards :

EN166. guaranteed minimum resistance of the protective eyewear against everyday risks including dropping the protective eyewear onto the ground, ageing by light exposure, exposure to heat or corrosion etc.

Mechanical strength symbols:

F. Low energy impact, resists a 6 mm, 0.86 g ball at 45 m/s

T. The letter T, immediately after the mechanical strength symbol, authorises use for high speed particles at extreme temperatures.

Others symbols:

€ European standard  Manufacturer name

Bollé Safety product approval certificates to CE standards will be sent on request.

	ROGKIT
EAN13 Unit pack	3660740005436
EAN13 Inner pack (number of unit per inner pack)	-
Size // Weight Inner pack	-
EAN13 Carton (number of unit per master pack)	3660740205430 (90 units)
Size // Weight Master pack	62x56x40 cm 17.8 kg

Maintenance: Pitted, scratched or damaged lenses must be replaced by replacing the complete product. If the frame is damaged also replace the complete product. After each use it is recommended to keep the spectacles or goggles in a microfibre pouch or rigid case.

Storage: All products must be stored in a dry and clean environment.

ROGUE	
Lens	PC - 2.2 mm - Curve 8
Frame	Nylon
Temples	Nylon
Spare lens	-
Country of origin	Taiwan

For more information on this product and the BSSI range, visit:

bolle-safety.com

BOLLÉ SAFETY / APAC
32-40 Fairchild Street
Heatherton VIC 3202
AUSTRALIA

